






Potentiometers

31JN301-F, 31JN302-F, 31JN305-F, 31JN401-F,
31JN405-F, 31JN501-F, 31JN505-F, 31JN601-F

Dimensions: in.
(except where noted)



RoHS Compliant

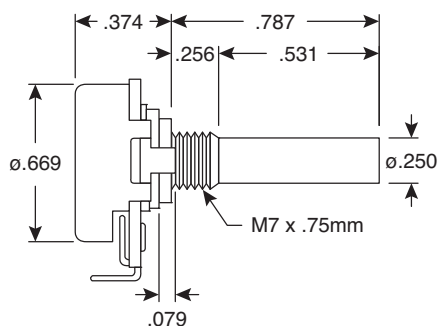

Specifications:

- Type: miniature carbon composition
- Taper: linear
- Rated wattage: .125W
- Rated voltage: 200V
- Insulation resistance: > 100MΩ @ 500VDC
- Dielectric strength: 500VAC for 1 minute
- Rotation life: 15,000 cycles
- Rotational noise: 47mV
- Total rotational angle: 300°±5°
- Rotation torque: 20 ~ 200gf. cm
- Shaft stop strength: 6Kgf. cm min.
- Tolerance: < 1MΩ±20%, ≥ 1MΩ±30%
- Shaft: zinc alloy
- Case: zinc plated steel
- RoHS Compliant

Mouser Stock No.	Value (Ω)
31JN301-F	1K
31JN302-F	2K
31JN305-F	5K
31JN401-F	10K
31JN405-F	50K
31JN501-F	100K
31JN505-F	500K
31JN601-F	1 Meg

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Alpha \(Taiwan\):](#)

[RV16AF-10-20R1-B500K](#) [RV16AF-10-20R1-B10K](#) [RV16AF-10-20R1-B50K](#) [RV16AF-10-20R1-B1K](#) [RV16AF-10-20R1-B5K](#) [RV16AF-10-20R1-B100K](#) [RV16AF-10-20R1-B1M](#) [RV16AF-10-20R1-B23](#)